

# NIKKON<sup>®</sup>



## NK Series Panel

### APPLICATIONS

- Office fit out
- Production area
- Food production area
- Retail
- School and Universities

### KEY FEATURES / BENEFITS

- IPART approved
- Economical direct replacement for T8 & T5 Troffers

[www.nikkon.com.au](http://www.nikkon.com.au)

## TECHNICAL SPECIFICATIONS


Wattages	18W, 36W, 60W
Luminous Flux	1600lm, 3400lm, 5600lm
Colour Rendering Index (CRI)	>80
Correlated Colour Temperature	4000K & 6000K
Operating Voltage Range	220 - 240VAC
Operating Frequency	50/60Hz
IP Rating	IP20
Weight	2.8kg
Warranty	3 years

## OPTIONAL FEATURES

0 - 10V Dimming
DALI Dimming
IP65
Surface Mounting Kits
Recess Plaster Ceiling Mounting Kits
Daylight Harvesting

ORDER CODE	Width x Length	CCT
LED-NK-PANEL-312-36-40	295 x 1195mm	4000K
LED-NK-PANEL-312-36-60	295 x 1195mm	6000K
LED-NK-PANEL-306-18-40	295 x 595mm	4000K
LED-NK-PANEL-306-18-60	295 x 595mm	6000K
LED-NK-PANEL-606-36-40	595 x 595mm	4000K
LED-NK-PANEL-606-36-60	595 x 595mm	6000K
LED-NK-PANEL-312-60-40	295 x 1195mm	4000K
LED-NK-PANEL-312-60-60	295 x 1195mm	6000K

## PHOTOMETRICS

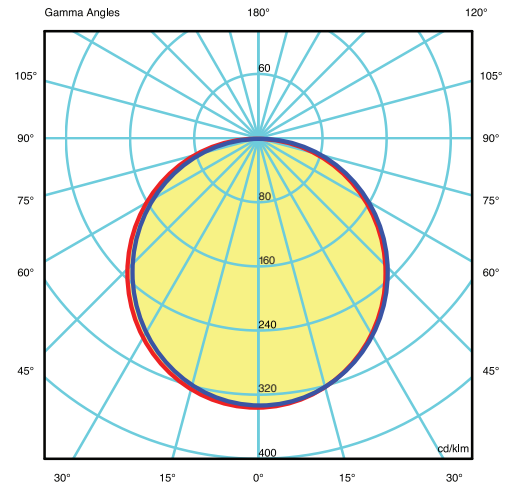

Please call us for a quote and project site assessment.



## OFFICE AND SHOWROOM

📍 Unit 3, 30-32 Artisan Road, SEVEN HILLS NSW 2147

✉️ sales@nikkonlighting.com.au

☎️ (02) 9620 9036

[www.nikkon.com.au](http://www.nikkon.com.au)