

NIKKON[®]

UGR Series

Unified Glare Rating

APPLICATIONS

- Office fit out
- Retail
- Medical Centre
- Library
- School and Universities

KEY FEATURES / BENEFITS

- IPART approved
- Low Glare
- Flicker Free
- Direct replacement for T8 & T5 Troffers

www.nikkon.com.au

TECHNICAL SPECIFICATIONS

Wattages	18W - 36W
Luminous Flux	1584lm & 3174lm
Colour Rendering Index (CRI)	>80
Correlated Colour Temperature	4000K & 6000K
UGR Rating	<19
Operating Voltage Range	200 - 240VAC
Operating Frequency	50/60Hz
IP Rating	IP20
Weight	2.9kg
Warranty	3 years


OPTIONAL FEATURES

0 - 10V Dimming
DALI Dimming
Medical – Cyanosis (COI = 0.7 must be <3.3)
IP65
Surface Mounting Kits
Recess Plaster Mounting Kits
Daylight Harvesting

ORDER CODE	Width x Length	CCT
LED-UGR-PANEL-312-36-40	295 x 1195mm	4000K
LED-UGR-PANEL-312-36-60	295 x 1195mm	6000K
LED-UGR-PANEL-306-18-40	295 x 595mm	4000K
LED-UGR-PANEL-306-18-60	295 x 595mm	6000K
LED-UGR-PANEL-606-36-40	595 x 595mm	4000K
LED-UGR-PANEL-606-36-60	595 x 595mm	6000K

HIGH CRI / CYANOSIS ORDER CODE	Width x Length	CCT
LED-UGR-CY-PANEL-312-36-40	295 x 1195mm	4000K
LED-UGR-CY-PANEL-306-18-40	295 x 595mm	4000K
LED-UGR-CY-PANEL-606-36-40	595 x 595mm	4000K

PHOTOMETRICS

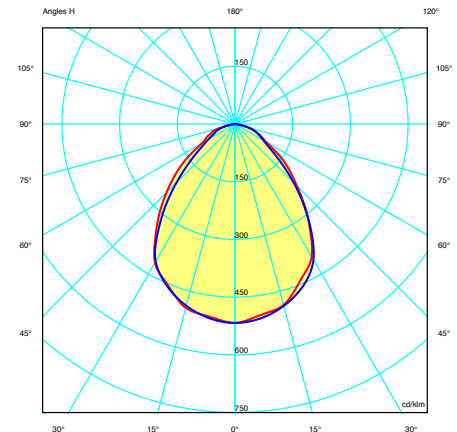

36W UGR Panel

Please call us for a quote and project site assessment.



OFFICE AND SHOWROOM

- Unit 3, 30-32 Artisan Road, SEVEN HILLS NSW 2147
- sales@nikkonlighting.com.au
- (02) 9620 9036