

# ZULO FLOODLIGHT



## LUMINAIRE SPECIFICATIONS

• Power	30W 50W
• Fitting Material	Die-cast aluminium Non-corrosive
• Fitting Color	Black
• Optical Cover	95% Transparency Tempered Glass
• Ingress Protection	IP65
• Impact Protection	IK08
• Voltage	220 ~ 240 Vac 50 / 60Hz
• Electrical Safety Class	Class I
• Operating Temperature	-30 ~ +45°C
• Installation	Mounting Bracket
• Surge Protections	Yes
• Pre-Wire	300 mm

## LED MODULE SPECIFICATIONS

• Color Temperature	3000K Warm White 5700K Day Light
• Color Rendering Index (CRI)	>70 Cool White >80 Warm White
• L70	100,000 Hrs @ 25°C
• PCB Material	Metal Core
• PCB Trace	Copper

## FEATURES

- Built-In ic Technology
- Direct AC supply connection (220 ~ 240 Vac 50 / 60Hz)
- No external driver required
- High system efficiency
- Mid Power LEDs
- Thin & lightweight size

## APPLICATION

- Parks, Gardens, Facade Lightings, Parking Areas, Commercial and Residential Areas

## ORDER CODE

WATTAGE	ORDER CODE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
30W	K10140 30W	181 x 181 x 43	0.7 kg
50W	K10141 50W	213 x 213 x 50	1.0 kg

\* Please indicate LED color temperature when ordering.

## MEASUREMENT

WATTAGE	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE
30W	3150	30
50W	5250	50



\* All result tested base on 5700K CCT LEDs.



## DIMENSION

## PHOTOMETRIC

K10140 30W

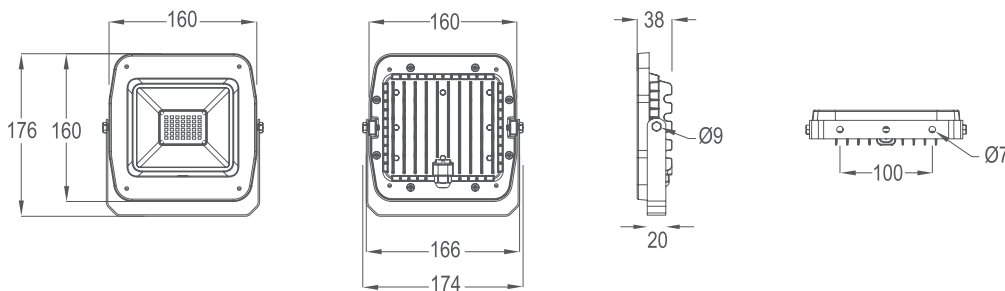

K10141 50W

